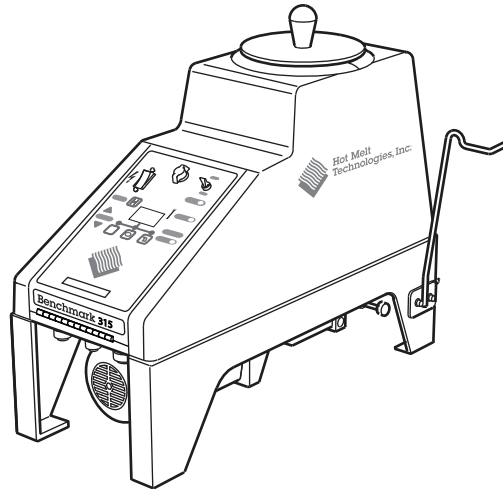


BENCHMARK 315

High Performance System

Standard Features

- ▶ Auto-Standby, Auto-Off Timer
- ▶ Manual Standby
- ▶ Programmable High Limit
- ▶ Diagnostics
- ▶ All Zone Temp Readouts
- ▶ Temp Readout, °F or °C
- ▶ System Set Lock
- ▶ Tank Filter
- ▶ Pump Ready Lock-out
- ▶ Precision Flow Control



Common Options


- ▶ #340-032 Key Lock
- ▶ #921-011 Steel Cart
- ▶ #910-100 Load Alert
- ▶ #922-050 Spray Pattern Controller
- ▶ Available in 120 or 220v

Benchmark Melt Unit 120v, 20 amp





DESCRIPTION	PART NUMBER P/N#	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
Benchmark 315 • HP System Control • 86 rpm / PA-30 • 100° F - 475° F	BM315-30-M4 ▶ Use XP Prefix for 220v	15 lbs. (2 Gal.)	1

Heated Hoses 120v ▶ Use XP Prefix for 220v

HOSE LENGTH	REGULAR HOSE P/N#	SPRAY HOSE P/N#
8 Ft.	DG0608-R	DG0608-S
12 Ft.	DG0612-R	DG0612-S
16 Ft.	DG0616-R	DG0616-S



Handguns & Automatic Guns 120v ▶ Use XP Prefix for 220v

CONFIGURATION	Standard Entry	Top Entry	In-Line	Automatic Gun
				
PART NUMBER #	DG-401-RS * DG-403-RS *	DG-403-RT *	DG-501-R * DG-503-R *	AV-600-RU

* Handgun Swivel: 01 = Straight Swivel; 03 = Ball Swivel

▶ See Gun/Nozzle Pages for available Bead and Spray Nozzles

Effective Date: 1/1/2018

All prices are subject to change without notice

©2018 Hot Melt Technologies, Inc

