




Boom & Balancer

933-001

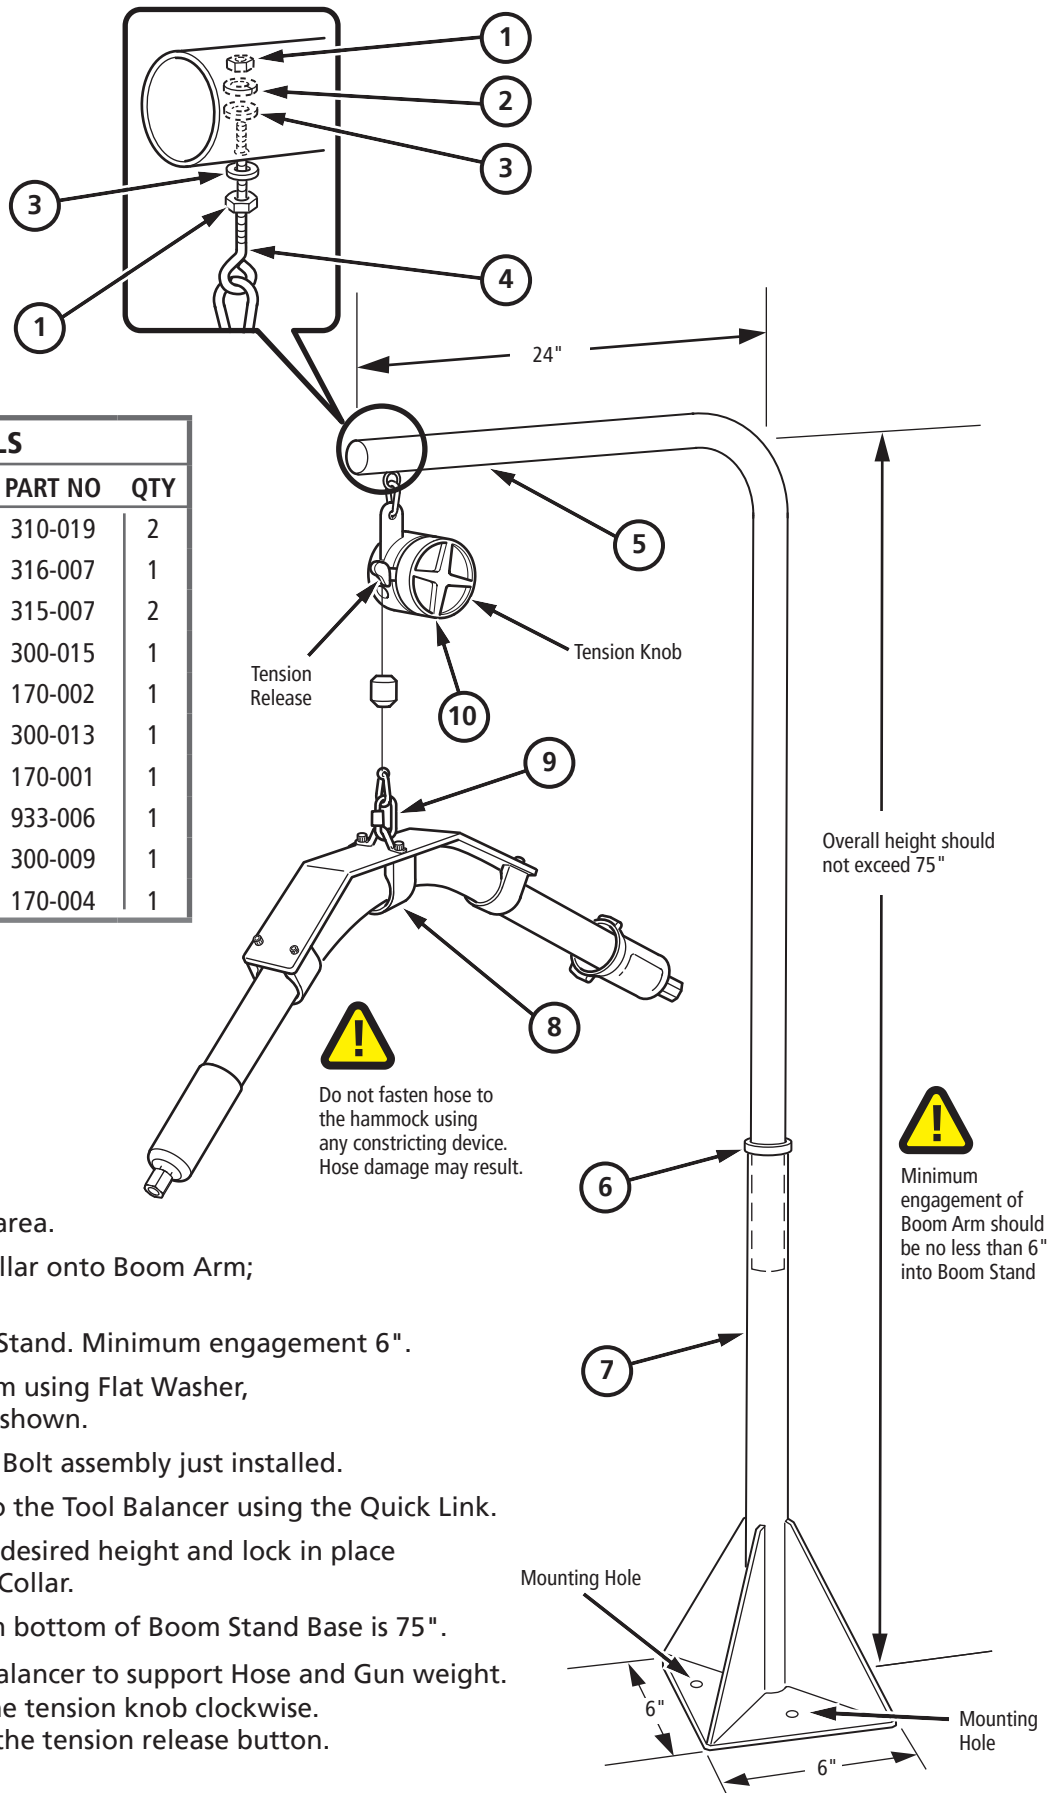

BILL OF MATERIALS			
ITEM	DESCRIPTION	PART NO	QTY
1	Hex Nut 1/4-20	310-019	2
2	Lock Washer 1/4"	316-007	1
3	Flat Washer 1/4"	315-007	2
4	Eye Bolt 1/4-20 X 1"	300-015	1
5	Boom Arm	170-002	1
6	Height Adjustment Collar	300-013	1
7	Boom Stand	170-001	1
8	Hose Hammock	933-006	1
9	Quick Link	300-009	1
10	Tool Balancer	170-004	1

1. Secure Boom Stand to work area.
2. Install Height Adjustment Collar onto Boom Arm; leave it loose at this time.
3. Insert Boom Arm into Boom Stand. Minimum engagement 6".
4. Insert Eye Bolt into Boom Arm using Flat Washer, Lock Washer and Hex Nut as shown.
5. Clip Tool Balancer to the Eye Bolt assembly just installed.
6. Attach the Hose Hammock to the Tool Balancer using the Quick Link.
7. Adjust the Boom Arm to the desired height and lock in place with the Height Adjustment Collar.
NOTE: Maximum height from bottom of Boom Stand Base is 75".
8. Adjust Tension on the Tool Balancer to support Hose and Gun weight.
 - a) To increase tension turn the tension knob clockwise.
 - b) To decrease tension press the tension release button.

