



PROFLEX® G5/G9 DUAL GRID

High Performance System


220v, 1ph

Standard Features

- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Ready Delay Timer
- ▶ Manual Standby
- ▶ Set Point Limit
- ▶ Front Panel Diagnostics
- ▶ All Zone Ready
- ▶ Temp Readout, °F or °C
- ▶ ±1°F Temp Control
- ▶ Hose/Gun On/Off Control
- ▶ 2 or 4 Hose/Gun Capability
- ▶ Audible Fault Alarm
- ▶ Service Clock
- ▶ Pump On/Off Control
- ▶ Precision Flow Control

Common Options

- ▶ #340-032 Key Lock
- ▶ #934-247 24h/7d Timer
- ▶ #921-011 Steel Cart Assembly
- ▶ #XP-922-221 OEM Interface Cable
- ▶ #XP-922-040 Remote Motor Run Cable
- ▶ #910-055 Pump Pressure Gauge
- ▶ 240v, 3ph available
- ▶ #911-112 Hinged Lid, 10", Installed
- ▶ Load Alert

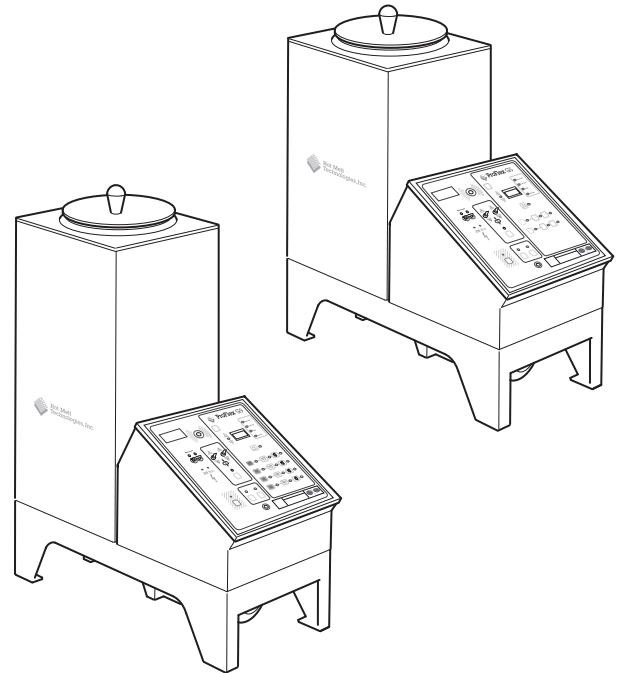

System Configuration

GX	XX	-	XX	-	40	-	X4	-	X
CONTROL PACKAGE	TANK SIZE		TANK HEATER HARNESS		PUMP		MOTOR		
 G5 - 2 hose/2 gun G9 - 4 hose/4 gun	17 lb 50 lb 85 lb 		 W - 3000 W @ 220V (17 lb only) WS - 3000 W @ 220V (50 and 85 lb only)		 PA-40		 CONSTANT SPEED M - 85 RPM, 1/6 HP F - 113 RPM, 1/3 HP K - 170 RPM, 1/3 HP VARIABLE SPEED A - AC 0-125 RPM		220v, 1ph "Blank" 240v, 3ph "3P"

Effective Date: 11/01/2024

All prices are subject to change without notice