




# BENCHMARK® 215 & 615

High Performance System  
Sealant Systems

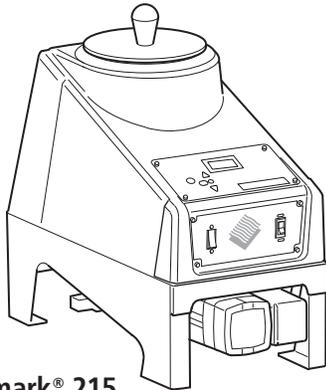


Benchmark® 215

### Standard Features

- ▶ Manual Standby
- ▶ Auto-Standby, Auto-Off Timer
- ▶ Microprocessor Temp Control
- ▶ All Zone Temp Readouts, °F or °C
- ▶ TFE Coated Melt Tanks
- ▶ Power Cord
- ▶ Steel Gear Pumps
- ▶ High Torque AC Drive Motor
- ▶ Precision Flow Control

### Common Options

- ▶ #921-011 Steel Cart
- ▶ #911-110 Hinged Lid, Installed (BM 615 Only)
- ▶ 615 available in 220V

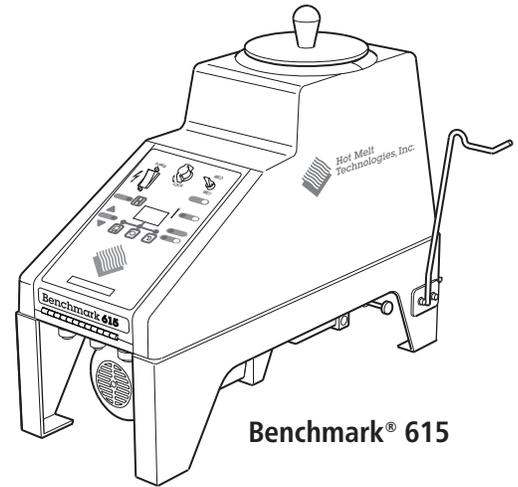

Benchmark® 615



**Benchmark® Melt Unit 120V** ▶ Use XP Prefix for 220V, 20 amp (615 only)


| DESCRIPTION    | PART NUMBER P/N | TANK CAPACITY (APPROX.) | HOSE/GUN CAPABILITY |
|----------------|-----------------|-------------------------|---------------------|
| Benchmark® 215 | BM215-HVR4-B    | 15 lb                   | 1                   |
| Benchmark® 615 | BM615-50-M4     | 20 lb                   | 1                   |

**Handguns 120V** ▶ Use XP Prefix for 220V

| CONFIGURATION | Standard Entry<br> |
|---------------|---|
| PART NUMBER   | DG-403-RS   |

**Heated Hoses 120V** ▶ Use XP Prefix for 220V

| HOSE LENGTH | REGULAR HOSE P/N |
|-------------|------------------|
| 8 Ft        | DG0808-HF        |
| 12 Ft       | DG0812-HF        |
| 16 Ft       | DG0816-HF        |

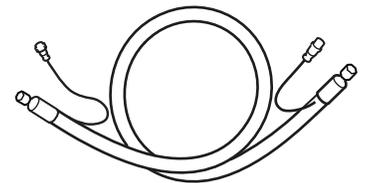

**Insulated Glass Gunning Tips**  
Solid Brass

| PART NUMBER   | ORIFICE    |
|---|------------|
| 156-098  | Tip Seat   |
| 156-IG3   | 3/16" Bead |
| -IG4     | 1/4" Bead  |
| -IG5  | 5/16" Bead |
| -IG6  | 3/8" Bead  |
| -IG7  | 7/16" Bead |
| -IG8  | 1/2" Bead  |
| -IG10   | 5/8" Bead  |
| -IG12   | 3/4" Bead  |

**Standard Bead Extrusion Nozzles**

| PART NUMBER   | ORIFICE |
|---|---------|
| 156-022  | .090    |
| 156-047  | .090    |

Effective Date: 03/06/2026  
All prices are subject to change without notice