BENCHMARK® 650

High Performance System

I.G. Sealant System

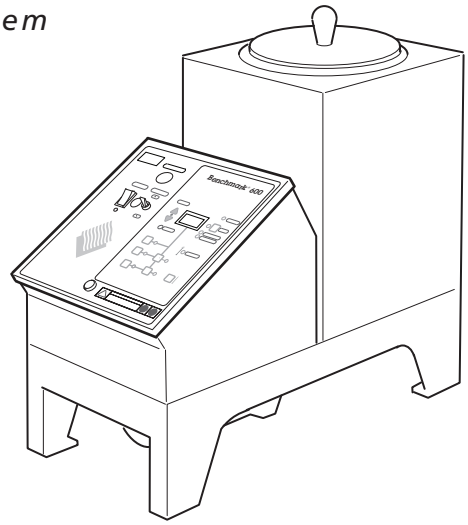

Standard Features

- Manual Standby
- Auto-Standby, Auto-Off Timer
- Microprocessor Temp Control
- All Zone Temp Readouts
- Patented Modular Melt Tanks
- Power Cord
- Hardended Steel Gear Pumps
- High Torque AC Drive Motor
- Precision Flow Control

Common Options

- #340-032 Key Lock
- #921-011 Steel Cart
- #911-112 Hinged Lid, 10", Installed
- Load Alert

Benchmark® Melt Unit 220V, 20 amp

DESCRIPTION	PART NUMBER P/N	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
BM650	BM650-WS-F4	50 lb	1

Handguns 220V

CONFIGURATION	Standard Entry 
PART NUMBER	XP-403-RS

Heated Hoses 220V

HOSE LENGTH	REGULAR HOSE P/N
8 Ft	XP1008-HF
12 Ft	XP1012-HF
16 Ft	XP1016-HF

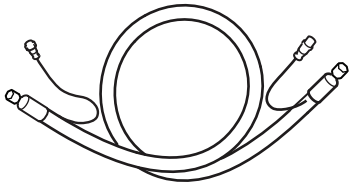

Insulated Glass Gunning Tips

Solid Brass

PART NUMBER	ORIFICE
156-098	Tip Seat
156-IG3	3/16" Bead
-IG4	1/4" Bead
-IG5	5/16" Bead
-IG6	3/8" Bead
-IG7	7/16" Bead
-IG8	1/2" Bead
-IG10	5/8" Bead
-IG12	3/4" Bead

Standard Bead Extrusion Nozzles

PART NUMBER	ORIFICE
156-022	.090
156-047	.090

Effective Date: 03/06/2026

All prices are subject to change without notice

©2026 Hot Melt Technologies, Inc