




# BENCHMARK® 715

High Performance System

### Standard Features

- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Manual Standby
- ▶ Programmable High Limit
- ▶ On/Off Hose/Gun Zones
- ▶ All Zone Temp Readouts
- ▶ Temp Readout, °F or °C
- ▶ Tank Filter
- ▶ Pump Ready Lock-out
- ▶ Precision Flow Control

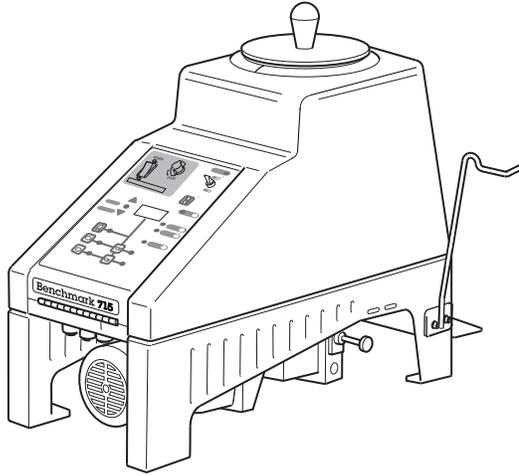

### Common Options

- ▶ #340-032 Key Lock
- ▶ #921-011 Steel Cart
- ▶ #922-050 Spray Pattern Controller
- ▶ #911-110 Hinged Lid, Installed
- ▶ Load Alert
- ▶ 220V Available




### Benchmark® Melt Unit 120V, 20 amp

DESCRIPTION	PART NUMBER P/N	TANK CAPACITY (APPROX.)	HOSE/GUN CAPABILITY
Benchmark® 715 • HP System Control • 86 rpm / PA-30 • 100° F - 475° F	BM715-30-M ▶ Use XP Prefix for 220V, 20 amp	15 lb (2 Gal)	2

### Heated Hoses 120V ▶ Use XP Prefix for 220V

HOSE LENGTH	REGULAR HOSE P/N	SPRAY HOSE P/N
8 Ft.	DG0608-R	DG0608-S
12 Ft.	DG0612-R	DG0612-S
16 Ft.	DG0616-R	DG0616-S

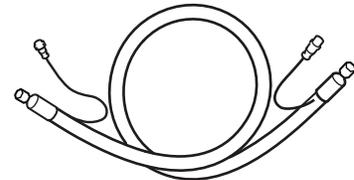

### Handguns & Automatic Guns 120V ▶ Use XP Prefix for 220V

CONFIGURATION	Standard Entry	Top Entry	In-Line	Automatic Gun
<b>PART NUMBER</b>	DG-401-RS * DG-403-RS *	DG-403-RT *	DG-501-R * DG-503-R *	AV-600-RU

\* Handgun Swivel: 01 = Straight Swivel; 03 = Ball Swivel

▶ See Gun/Nozzle Pages for available Bead and Spray Nozzles

Effective Date: 03/01/2026  
All prices are subject to change without notice