



## PROFLEX® HD G5/G9 SINGLE GRID

High Performance System, HD Display

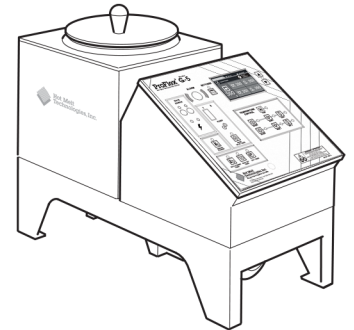
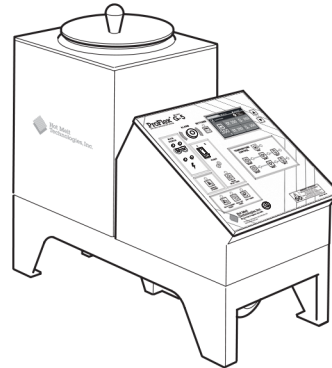
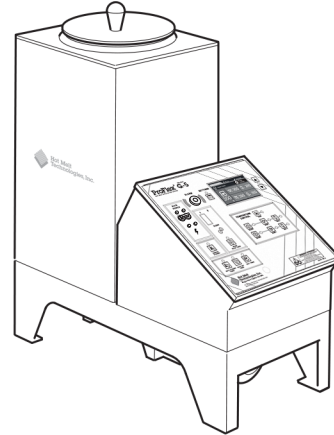
220V, 1ph

### Standard Features










- ▶ High-Definition Display
- ▶ Integrated 24/7 Timer
- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Ready Delay Timer
- ▶ Manual Standby
- ▶ All Zone Ready
- ▶ Set Point Limit
- ▶ Set Lock
- ▶ Language Select: En, Sp, Fr
- ▶ Temp Readout, °F or °C
- ▶ ±1 °F Temp Control
- ▶ Hose/Gun On/Off Control
- ▶ 2 or 4 Hose/Gun Capability
- ▶ Audible Fault Alarm
- ▶ Service Clock
- ▶ Pump On/Off Control
- ▶ Precision Flow Control

### Common Options

- ▶ #340-032 Key Lock
- ▶ #921-011 Steel Cart Assembly
- ▶ #XP-922-221 OEM Interface Cable
- ▶ #XP-922-040 Remote Motor Run Cable
- ▶ #910-055 Pump Pressure Gauge
- ▶ 240V, 3ph available
- ▶ #911-111 Hinged Lid, 7"
- ▶ #911-112 Hinged Lid, 10"
- ▶ Load Alert



### System Configuration 220V, 40 amp, 1ph

GX	XX	-	X	-	40	-	XHD
CONTROL PACKAGE	TANK SIZE	TANK HEATER HARNESS	PUMP	MOTOR			
 G5 - 2 hose/2 gun G9 - 4 hose/4 gun	 17 lb	 3 - 1800 W @ 220V 4 - 2400 W @ 220V	 PA-40	 <p><b>CONSTANT SPEED</b></p> M - 85 RPM, 1/6 HP F - 113 RPM, 1/3 HP K - 170 RPM, 1/3 HP			
	 25 lb			 <p><b>VARIABLE SPEED</b></p> A - AC 0-125 RPM			
	 35 lb						
	 50 lb						