



PROFLEX® HD G5/G9 DUAL GRID

High Performance System, HD Display


220V, 1ph

Standard Features

- ▶ High-Definition Display
- ▶ Integrated 24/7 Timer
- ▶ Auto-Standby
- ▶ Auto-Off Timer
- ▶ Ready Delay Timer
- ▶ Manual Standby
- ▶ All Zone Ready
- ▶ Set Point Limit
- ▶ Set Lock
- ▶ Language Select: En, Sp, Fr
- ▶ Temp Readout, °F or °C
- ▶ ±1°F Temp Control
- ▶ Hose/Gun On/Off Control
- ▶ 2 or 4 Hose/Gun Capability
- ▶ Audible Fault Alarm
- ▶ Service Clock
- ▶ Pump On/Off Control
- ▶ Precision Flow Control

Common Options

- ▶ #340-032 Key Lock
- ▶ #921-011 Steel Cart Assembly
- ▶ #XP-922-221 OEM Interface Cable
- ▶ #XP-922-040 Remote Motor Run Cable
- ▶ #910-055 Pump Pressure Gauge
- ▶ 240V, 3ph available
- ▶ #911-112 Hinged Lid, 10"
- ▶ Load Alert
- ▶ #934-112 Modbus, 2-Way Communication

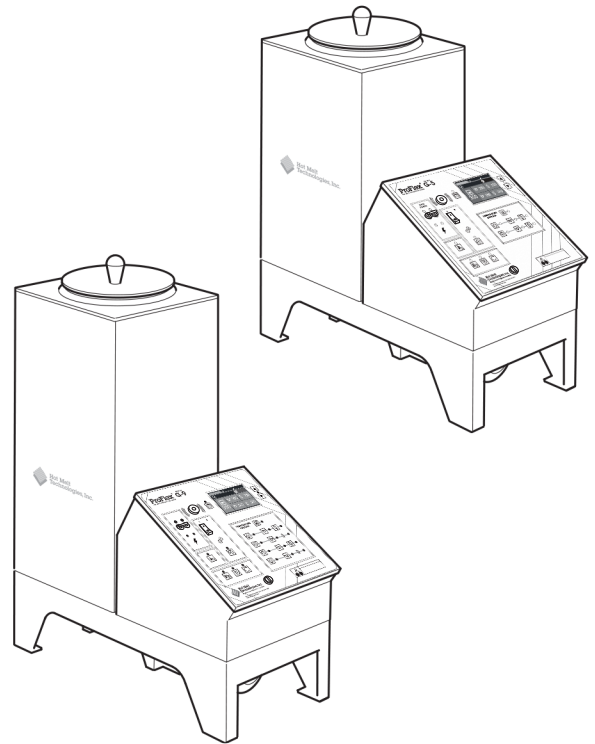

System Configuration 220V, 40 amp, 1ph

GX	XX	-	XX	-	40	-	XHD	-	X
CONTROL PACKAGE	TANK SIZE		TANK HEATER HARNESS		PUMP		MOTOR		VOLTAGE
 G5 - 2 hose/2 gun G9 - 4 hose/4 gun	17 lb 		 W - 3000 W @ 220V (17 lb only)		 PA-40		 CONSTANT SPEED M - 85 RPM, 1/6 HP F - 113 RPM, 1/3 HP K - 170 RPM, 1/3 HP		220V, 1ph "Blank"
	50 lb 		 WS - 3000 W @ 220V (50 and 85 lb only)				 VARIABLE SPEED A - AC 0-125 RPM		240V, 3ph "3P"
	85 lb 								

Effective Date: 05/21/2026
 All prices are subject to change without notice