

**Hot Melt
Technologies, Inc.**
No One Puts It Together Like HMT®

It's Time To Step Up to a Benchmark® 215-HV

Should you choose a hot melt system with a small melt tank – or a large one? A low-cost, low-volume unit ... or a low cost, higher-volume unit that can accommodate future growth?

The 4th generation Benchmark 215-HV System from Hot Melt Technologies (HMT®,) simplifies your decision-making process. With its larger tank, high-output pump, and one or two-gun capacity, it's ready to work for you now ... and in the future.

Offering an excellent performance-to-price ratio, the Benchmark 215-HV is:

Pre-Assembled And Easy To Set-up.

Plug the Benchmark 215-HV in to a 120-volt outlet, load it with adhesive and turn on the power. In just 30 minutes you're ready to start gluing.

Built Tough For Years Of Dependability.

The Benchmark 215-HV includes a sealed, fractional-HP drive motor and cast aluminum melt tank. It also features a "cool touch" fiberglass shroud and high-strength hoses along with a gun (or guns) with steel nozzles.

Now With Front Panel Digital Temperature Control.

Simply adjust the temperature between 225°F and 400°F with the front panel readout, lock the setting, and keep meddling fingers away! The system monitors temperature to assure safe and trouble free operation.




Benchmark® 215-HV Hot Melt System

An Affordable Hot Melt System With the Power to Meet Your Needs

Benchmark 215-HV

The Benchmark® 215-HV Hot Melt System is perfect for medium- to high- volume product assembly and packaging applications. And, given HMT's reputation for quality, durability and performance, it's a system you can install with confidence.

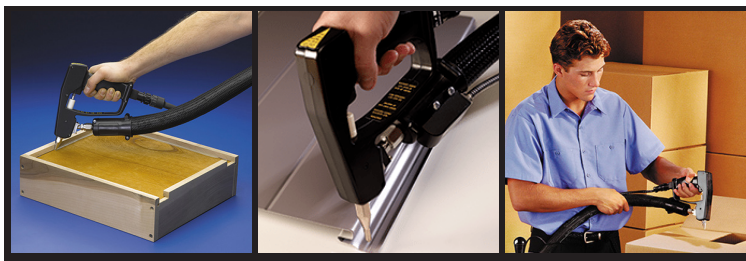

SPECIFICATIONS

Tank Capacity

- 1.85 Gallons (7 Liters) Approx. 13 lb*

Number of Hoses

- 2 hoses/handguns

Hose Lengths

- 8, 12 or 16 feet

Handgun Configuration

- Standard Entry
- Top Entry
- In-Line Entry

Electrical

- 120 vac, 20 amp

Drive Motor

- All-electric, fractional HP

Pump

- Cast iron with steel gears

Viscosity

- Up to 10,000 cps

Flow Control

- Up to 50 lb per hour*

Melt Rate

- Up to 12 lb per hour*

Temperature Control

- Micro Processor
- From 225° F to 400° F

Dimensions

- 11" x 24" x 20" high (approx. 60 lb)

Warranty

- One-yr. limited warranty

Accessories

- Overhead Hose Boom & Balancer
- Steel Cart with Castors
- Shot Timer & Foot Switch
- Automatic Guns
- Guns, Nozzles: Bead or Spray, Interchangeable

Applications

- Case and carton sealing
- Woodworking
- Foam laminating
- Product assembly

*Rates will vary depending on adhesive type and viscosity.

UL AND CSA COMPLIANT



ISO 9000 CERTIFIED



**Hot Melt
Technologies, Inc.**
No One Puts It Together Like HMT®



(248)853-2011



info@hotmelt-tech.com



1723 W. Hamlin Road
Rochester Hills, MI 48309